



**LIFT CAPACITIES**



A: Reach from swing centerline to arm top  
 B: Arm top height above/below ground  
 C: Lift point  
 Bucket: without Dozer blade: up  
 Relief valve setting: 23.0 MPa

SK30SR Canopy		Standard arm: 1.32 m, Bucket: without Shoe: 300 mm Steel shoe					Radius	
A		2.0 m	3.0 m	4.0 m	At Max. Reach			
B								
4.0 m	kg		760	610		730	580	3.08 m
3.0 m	kg		*760	610		470	370	3.97 m
2.0 m	kg		730	570	460	360	310	4.38 m
1.0 m	kg		670	520	430	340	290	4.48 m
G. L.	kg	1,230	890	640	490	420	330	4.29 m
-1.0 m	kg	1,250	910	640	490			3.77 m
-2.0 m	kg	*970	970			*650	*650	2.60 m

SK35SR Canopy		Standard arm: 1.37 m, Bucket: without Shoe: 300 mm Steel shoe					Radius	
A		1.0 m	2.0 m	3.0 m	4.0 m	At Max. Reach		
B								
4.0 m	kg					790	730	3.32 m
3.0 m	kg					580	540	4.15 m
2.0 m	kg			890	820	560	530	4.54 m
1.0 m	kg			820	760	540	500	4.63 m
G. L.	kg		1,510	1,350	790	730	520	4.45 m
-1.0 m	kg	*2,290	*2,290	1,530	1,370	780	730	3.95 m
-2.0 m	kg		*1,550	1,420				2.90 m

SK30SR Canopy		Long arm: 1.62 m, Bucket: without Shoe: 300 mm Steel shoe					Radius	
A		1.0 m	2.0 m	3.0 m	4.0 m	At Max. Reach		
B								
4.0 m	kg					580	460	3.52 m
3.0 m	kg					470	380	4.30 m
2.0 m	kg			740	580	460	360	4.68 m
1.0 m	kg			670	520	430	340	4.77 m
G. L.	kg		1,210	880	630	480	410	4.60 m
-1.0 m	kg	*1,660	*1,660	1,220	890	620	470	4.12 m
-2.0 m	kg		1,270	930	650	500		3.14 m

SK35SR Canopy		Long arm: 1.67 m, Bucket: without Shoe: 300 mm Steel shoe					Radius	
A		1.0 m	2.0 m	3.0 m	4.0 m	At Max. Reach		
B								
4.0 m	kg					590	550	3.74 m
3.0 m	kg					650	610	4.47 m
2.0 m	kg			*890	840	570	530	4.83 m
1.0 m	kg			830	770	540	500	4.92 m
G. L.	kg		1,490	1,330	780	720	520	4.75 m
-1.0 m	kg	*1,870	*1,870	1,500	1,340	770	710	4.29 m
-2.0 m	kg		1,550	1,390	790	730		3.39 m

SK30SR Cab		Standard arm: 1.32 m, Bucket: without Shoe: 300 mm Steel shoe					Radius			
A		1.0 m	2.0 m	3.0 m	4.0 m	At Max. Reach				
B										
4.0 m	kg			800	640		760	610	3.08 m	
3.0 m	kg						500	390	3.97 m	
2.0 m	kg			770	600	480	380	410	4.38 m	
1.0 m	kg			710	550	460	360	390	4.48 m	
G. L.	kg		1,300	950	680	520	450	350	4.29 m	
-1.0 m	kg	*2,050	*2,050	1,320	960	680	520		3.77 m	
-2.0 m	kg		*970	*970				*650	*650	2.60 m

SK35SR Cab		Standard arm: 1.37 m, Bucket: without Shoe: 300 mm Steel shoe					Radius				
A		1.0 m	2.0 m	3.0 m	4.0 m	At Max. Reach					
B											
4.0 m	kg					610	570	820	760	3.32 m	
3.0 m	kg					610	570	570	530	4.15 m	
2.0 m	kg			930	860	590	550	480	450	4.54 m	
1.0 m	kg			860	790	570	530	460	430	4.63 m	
G. L.	kg		1,580	1,410	830	760	550	510	470	4.45 m	
-1.0 m	kg	*2,290	*2,290	1,600	1,430	820	760		560	520	3.95 m
-2.0 m	kg		*1,550	1,490				*890	840	2.90 m	

SK30SR Cab		Long arm: 1.62 m, Bucket: without Shoe: 300 mm Steel shoe					Radius				
A		1.0 m	2.0 m	3.0 m	4.0 m	At Max. Reach					
B											
4.0 m	kg					610	490	3.52 m			
3.0 m	kg					500	400	430	340	4.30 m	
2.0 m	kg			780	610	480	380	370	290	4.68 m	
1.0 m	kg			710	550	460	360	350	270	4.77 m	
G. L.	kg		1,280	930	670	510	440	340	360	280	4.60 m
-1.0 m	kg	*1,660	*1,660	1,290	940	660	500	440	340	330	4.12 m
-2.0 m	kg		1,340	980	690	530			640	500	3.14 m

SK35SR Cab		Long arm: 1.67 m, Bucket: without Shoe: 300 mm Steel shoe					Radius				
A		1.0 m	2.0 m	3.0 m	4.0 m	At Max. Reach					
B											
4.0 m	kg					680	630	680	630	3.74 m	
3.0 m	kg					610	570	500	470	4.47 m	
2.0 m	kg			*890	870	590	550	430	410	4.83 m	
1.0 m	kg			870	800	570	530	410	380	4.92 m	
G. L.	kg		1,560	1,400	820	750	540	500	430	400	4.75 m
-1.0 m	kg	*1,870	*1,870	1,570	1,400	810	740	540	500	490	4.29 m
-2.0 m	kg	*3,080	*3,080	1,620	1,450	830	770		700	650	3.39 m

- Notes:**
- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and height. Weight of all accessories must be deducted from the above lift capacities.
  - Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
  - Arm top defined as lift point.
  - The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lift capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.
  - Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
  - Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice. Copyright by KOBELCO CONSTRUCTION MACHINERY CO., LTD. No part of this catalog may be reproduced in any manner without notice.

**KOBELCO CONSTRUCTION EQUIPMENT INDIA PVT. LTD.**

H-200, Sector-63, Noida, Distt: G.B. Nagar, U.P. - 201 307, INDIA  
 Tel : +91-120-4079900 Fax : +91-120-4079999  
 www.kobelco-in.com

Inquiries To:

SK30SR/SK35SR-INDIA-101-19040001

**KOBELCO**

SK30SR-6/SK35SR-6

- **Bucket Capacity:**  
0.12 m<sup>3</sup> ISO heaped
- **Engine Power:**  
18.1 kW/2,400 min<sup>-1</sup> (ISO 14396)
- **Operating Weight:**  
3,570 kg (cab)/3,410 kg (canopy) – SK30SR  
3,950 kg (cab)/3,780 kg (canopy) – SK35SR

**SK30SR SK35SR**




**We Save You Fuel**  
Achieving a Low-Carbon Society

Full-Size Performance, Short-Radius Agility and Quiet Operation

# COMPACT YET TOUGH MINI

The new KOBELCO SK30SR and SK35SR expand the horizons of mini excavators, and offer practical performance benefits while maintaining a short tail swing. The new Energy Conservation S-mode saves even more fuel, and Kobelco's proprietary iNDr Cooling System ensures quiet operation, protection from dust, and easy maintenance. For greater operator comfort and safety, the spacious canopy design offers plenty of room and an unobstructed view. It all adds up to a highly productive performance, short-radius agility and a low-noise environment, with exceptional performance advantages and a full range of value-added functions.

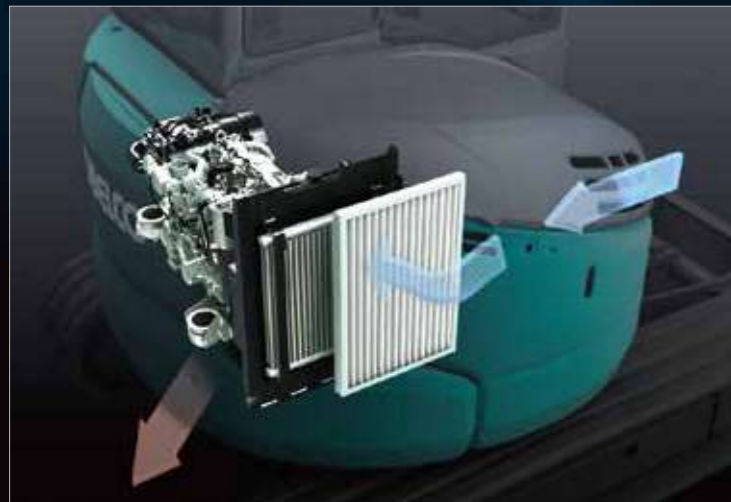




PERFORMANCE

Fuel Economy and Efficient Performance

Integrated-Flow Pump System

KOBELCO's IFPS utilizes three pumps to optimize performance, with the dozer pump providing additional digging power as needed.

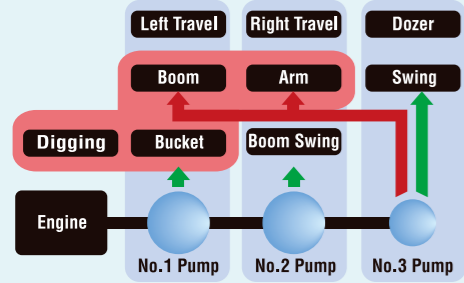

Energy Conservation Mode

The SK30SR/SK35SR adapts S mode which enables further less fuel consumption compared with H mode.

Further less fuel consumption



Automatic Two-Speed Travel

Two-speed travel function automatically shifts into Low Mode when a load is applied.


Travel Switch

The travel lever is fitted with the travel switch for easy switching to H-Mode travel.



Dozer-Blade Shape

KOBELCO's unique blade design solves this problem by forming the earth into an arc that always falls forward.

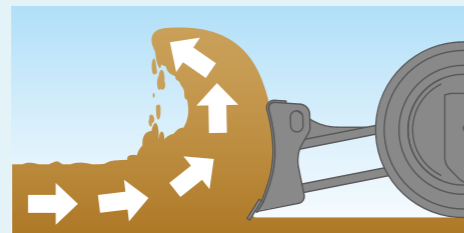

Short Tail Swing

The compact tail swing improves operating efficiency in limited space.

Tail Overhang: 0 mm



Wide Working Range

A larger boom and arm are provided as standard equipment to ensure a wider working range.

Max. Digging Reach:


5,200 mm (SK30SR)

5,350 mm (SK35SR)



ENVIRONMENT

iNDR Cooling System

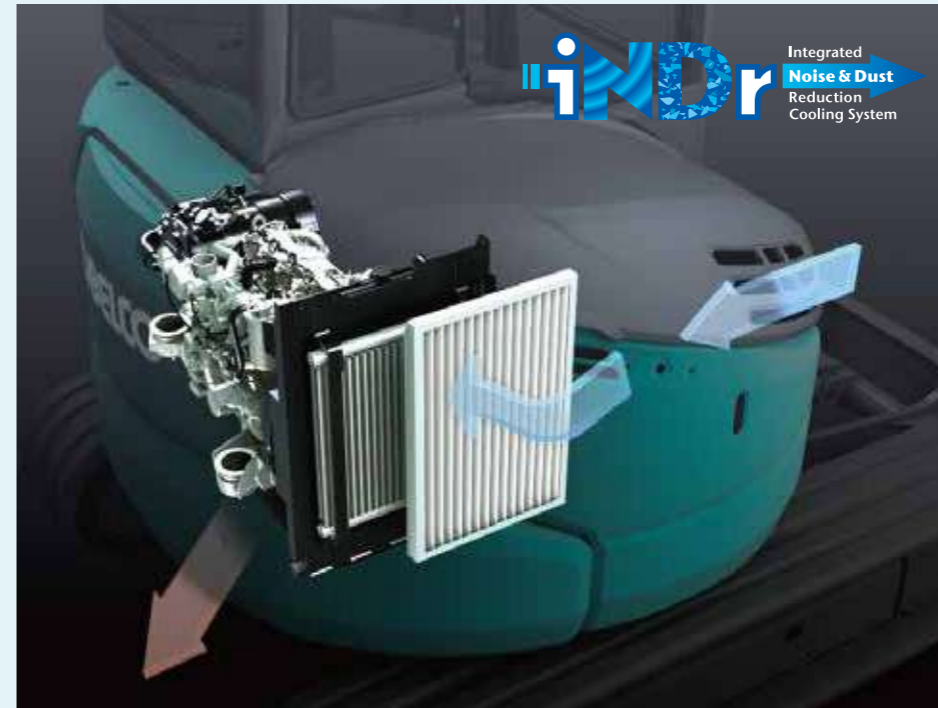

Protection from Dust and Easy Maintenance

The iNDR filter fitted in front of the cooling system ensures easy cleaning. The iNDR system on the SK30SR/SK35SR features air intake at the front of the machine and air exhaust underneath.

Visual Checking and Easy Cleaning


Because the iNDR filter removes dust from the intake air, cooling components stay dirt-free and do not require regular cleaning. The iNDR filter itself can be easily



removed and cleaned without the use of tools.

iNDR Filter

The stainless-steel filter is extremely effective against dust, with 30-mesh wave-type screen that removes tiny dust particles from the intake air.

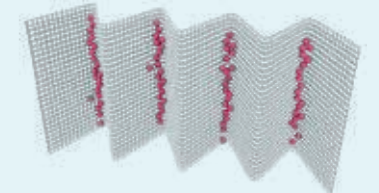

\*30-mesh means that there are 30 holes formed by horizontal and vertical wires in every square inch of filter.

Comfortable Work Environment



Spacious Work Environment

Broader floor space and a greater sliding range for the seat give operators plenty of foot room. Wide operational space is provided with more room between the left and right control consoles.

Color Liquid Crystal Monitor (Optional)

The color crystal monitor is fitted as option. Operation data as well as the full range of machine-status data can readily be checked.

Operator Safety

Reliable Canopy Structure

TOPS and GUARD LEVEL 1

\*Cab specification is optional





## MAINTENANCE

# Easy Daily Maintenance

### Easy Access to Engine Compartment



High-grade fuel filter



Pre fuel filter with built-in water separator

### Easy Access to Component Under the Seat



Hour meter



Two-piece floor mats for easy washing

### Easy Access to Cooling Unit



iNDr filter



Air cleaner

## RELIABILITY

# Reliable Construction



**Bucket**  
Cast-iron idler link provide greater strength.



**Dozer**  
Box construction dozer supports provide greater strength.



**Swing bracket**  
Large, thick cast-iron swing bracket/front bracket.






**Hydraulic piping**  
The hydraulic piping is housed inside the swing bracket.

## DIMENSIONS

### SK30SR




\*Without including height of shoe.

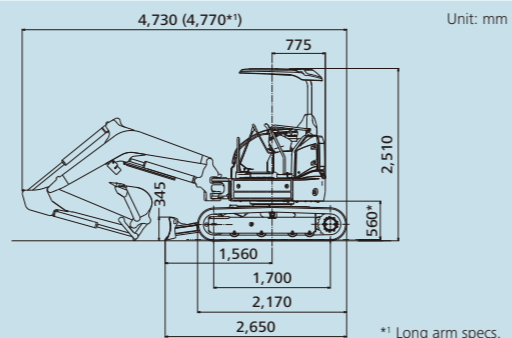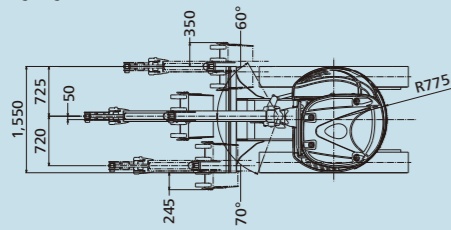

\*1 Long arm specs.

### SK35SR

\*Without including height of shoe.

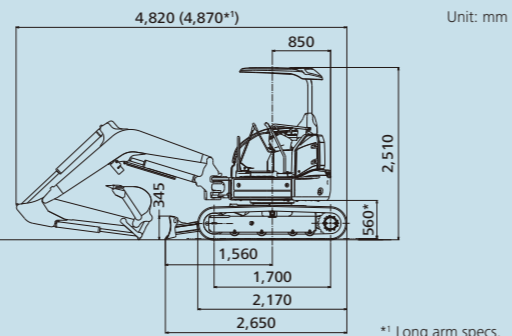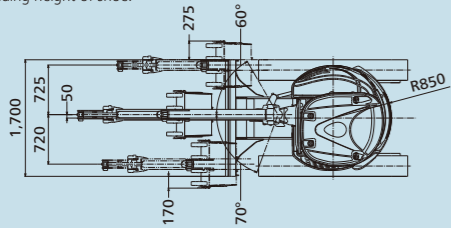

\*1 Long arm specs.

## SPECIFICATIONS

### SK30SR


MODEL		SK30SR	
Type		SK30SR-6	
Arm		Standard arm	Long arm
Operating Weight	Cab	kg	3,500
	Canopy	kg	3,340
Bucket Capacity	m <sup>3</sup>	0.12	0.12
Bucket Width	mm	700	
Arm Length	m	1.32	1.62
Bucket Digging Force	kN	27.7	27.7
Arm Crowding Force	kN	19.1	16.5
ENGINE			
Model		YANMAR 3TNV82A-B	
Type		Water cooled, 4-cycle, 3-cylinder, direct injection, diesel engine	
Power Output (ISO 14396)	kW/min <sup>-1</sup>	18.1/2,400	
Max. Torque (ISO 14396)	N·m/min <sup>-1</sup>	79.4/1,440	
Displacement	L	1.331	
Fuel Tank	L	42.0	
HYDRAULIC SYSTEM			
Pump		Two variable displacement pumps + one gear pump	
Max. Discharge Flow	L/min	2 x 38.4, 1 x 19.2	
Relief Valve Setting	MPa	23.0	
Hydraulic Oil Tank (system)	L	20.4 (44.8)	
TRAVEL SYSTEM			
Travel Motors		2 x axial-piston, two-step motors	
Parking Brake		Oil disc brake per motor	
Travel Speed (high/low)	km/h	4.2/2.5	
Gradeability	% (degree)	58 (30)	
Drawbar Pulling Force	Cab	kN	39.6
	Canopy	kN	39.7
CRAWLER			
Shoe		Steel shoe	
Ground Pressure	Cab	kPa	31.3
	Canopy	kPa	29.9
			31.5
			30.1
SWING SYSTEM			
Swing Motor		Axial piston motor	
Parking Brake		Oil disc brake	
Swing Speed	min <sup>-1</sup>	8.4	
SIDE DIGGING MECHANISM			
Type		Boom swing	

### SK35SR


MODEL		SK35SR	
Type		SK35SR-6	
Arm		Standard arm	Long arm
Operating Weight	Cab	kg	3,870
	Canopy	kg	3,710
Bucket Capacity	m <sup>3</sup>	0.12	0.12
Bucket Width	mm	700	
Arm Length	m	1.37	1.67
Bucket Digging Force	kN	27.8	27.8
Arm Crowding Force	kN	22.4	19.5
ENGINE			
Model		YANMAR 3TNV82A-B	
Type		Water cooled, 4-cycle, 3-cylinder, direct injection, diesel engine	
Power Output (ISO 14396)	kW/min <sup>-1</sup>	18.1/2,400	
Max. Torque (ISO 14396)	N·m/min <sup>-1</sup>	79.4/1,440	
Displacement	L	1.331	
Fuel Tank	L	42.0	
HYDRAULIC SYSTEM			
Pump		Two variable displacement pumps + one gear pump	
Max. Discharge Flow	L/min	2 x 38.4, 1 x 19.2	
Relief Valve Setting	MPa	23.0	
Hydraulic Oil Tank (system)	L	20.4 (44.8)	
TRAVEL SYSTEM			
Travel Motors		2 x axial-piston, two-step motors	
Parking Brake		Oil disc brake per motor	
Travel Speed (high/low)	km/h	4.2/2.5	
Gradeability	% (degree)	58 (30)	
Drawbar Pulling Force	Cab	kN	39.3
	Canopy	kN	39.4
CRAWLER			
Shoe		Steel shoe	
Ground Pressure	Cab	kPa	34.6
	Canopy	kPa	33.2
			34.8
			33.3
SWING SYSTEM			
Swing Motor		Axial piston motor	
Parking Brake		Oil disc brake	
Swing Speed	min <sup>-1</sup>	8.4	
SIDE DIGGING MECHANISM			
Type		Boom swing	

## WORKING RANGES

### SK30SR

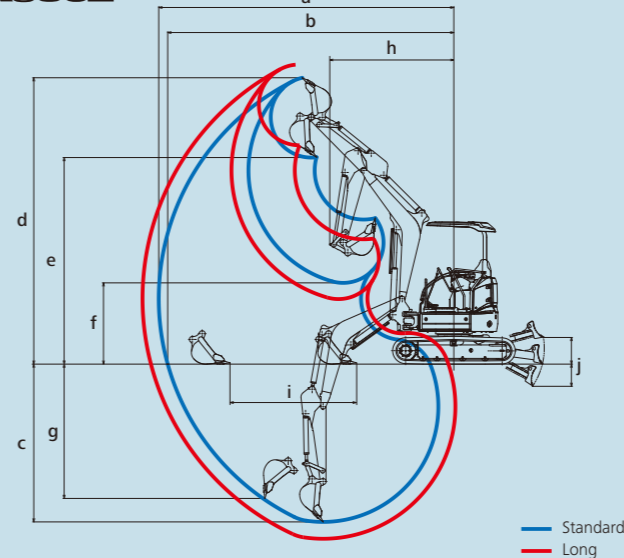

### SK35SR

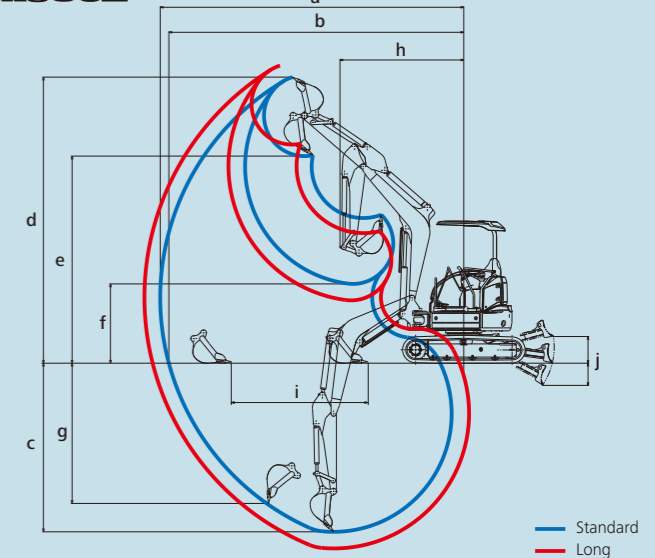

Arm length	Canopy		Cab	
	STD 1.32 m	Long 1.62 m	STD 1.32 m	Long 1.62 m
a-Max. digging reach	5,200	5,490	5,200	5,490
b-Max. digging reach at ground level	5,040	5,340	5,040	5,340
c-Max. digging depth	2,800	3,080	2,820	3,130
d-Max. digging height	5,050	5,280	4,800	5,000
e-Max. dumping clearance	3,640	3,860	3,420	3,600
f-Min. dumping clearance	1,430	1,140	1,300	995
g-Max. vertical wall digging depth	2,370	2,840	2,360	2,860
h-Min. swing radius	2,190	2,270	2,300	2,340
at boom swing (left side)	1,810	1,880	1,910	1,950
i-Horizontal digging stroke at ground level	2,230	2,640	2,230	2,640
j-Dozer blade (height/depth)	470/400		470/400	

Arm length	Canopy		Cab	
	STD 1.37 m	Long 1.67 m	STD 1.37 m	Long 1.67 m
a-Max. digging reach	5,350	5,640	5,350	5,640
b-Max. digging reach at ground level	5,200	5,490	5,200	5,490
c-Max. digging depth	2,970	3,270	3,050	3,350
d-Max. digging height	5,040	5,240	4,870	5,050
e-Max. dumping clearance	3,650	3,850	3,490	3,670
f-Min. dumping clearance	1,400	1,100	1,310	1,010
g-Max. vertical wall digging depth	2,470	2,760	2,470	2,760
h-Min. swing radius	2,150	2,220	2,320	2,330
at boom swing (left side)	1,810	1,840	1,930	1,940
i-Horizontal digging stroke at ground level	2,400	2,860	2,400	2,860
j-Dozer blade (height/depth)	470/400		470/400	